



CONTI[®] SYNCHROFORCE CXP

Heavy-duty timing belts for high power transmission at high speeds

Properties:

- Temperature range from -20 °C to +100 °C depending on application
- PAH category 2 according to „2014 AfPS GS:01 PAK“
- Electrically conductive in accordance with ISO 9563
- Conditionally resistant to oil
- Ozone-resistant
- Suitable for tropical climates
- Resistant to aging
- Suitable for reverse flexing/reverse tensioning idlers
- Maintenance-free
- Increased performance

Belt structure:

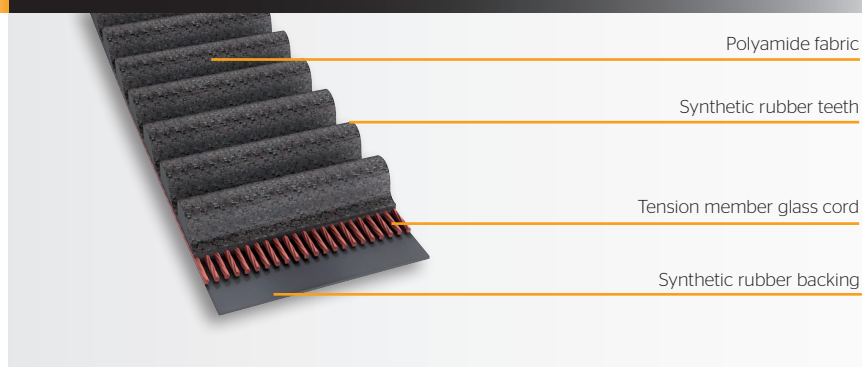

HTD

Profile	Length range L _p (mm)
HTD 3M CXP	111 - 1569
HTD 5M CXP	200 - 2000
HTD 8M CXP	288 - 3808
HTD 14M CXP	966 - 4578

STD

Profile	Length range L _p (mm)
STD S8M CXP	440 - 2848

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en