


CONTI® V FO ADVANCE


Transversely stiff raw-edge heavy-duty V-belts for powerful, sustained power transmission with enhanced running smoothness, according to DIN 7753

Properties:

- Temperature range from -30 °C to +90 °C
- Very good flexibility thanks to molded teeth
- Enhanced running smoothness
- Matched set L=L (from 1000 mm)
- Electrically conductive in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof
- Increased performance




Belt structure:

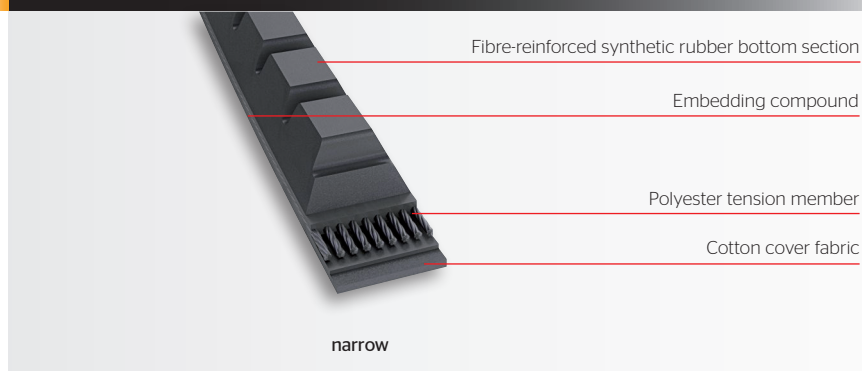

Profile	Length range L _d (mm)
XPZ / 3VX	562 - 3550
XPA	590 - 4000
XPB / 5VX	950 - 6700
XPC	2000 - 7100

Comparison of products:

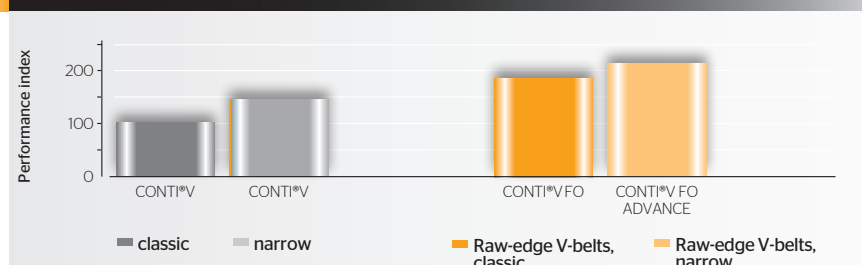

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en