


CONTI[®]V

Wrapped V-belts for demanding drives in all sectors of machine engineering, classic according to DIN 2215, narrow according to DIN 7753

Properties:

- Temperature range from -55 °C to +70 °C
- Matched set L=L (from 1000 mm)
- Electrically conductive in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof

Belt structure:

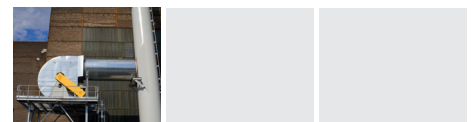


classic

Profile	Length range L ₁ (mm)
10/Z	425 - 2500
13/A	457 - 6305
17/B	584 - 9525
20/-	900 - 8000
22/C	1041 - 13208
25/-	1300 - 9000
32/D	2000 - 13208
40/E	4000 - 13208

narrow

Profile	Length range L _d (mm)
SPZ / 3V / 9N	512 - 3550
SPA	732 - 5000
SPB / 5V / 15N	1250 - 8000
19	1400 - 4475
SPC	2185 - 16500
8V / 25N	4318 - 12700

Comparison of products:

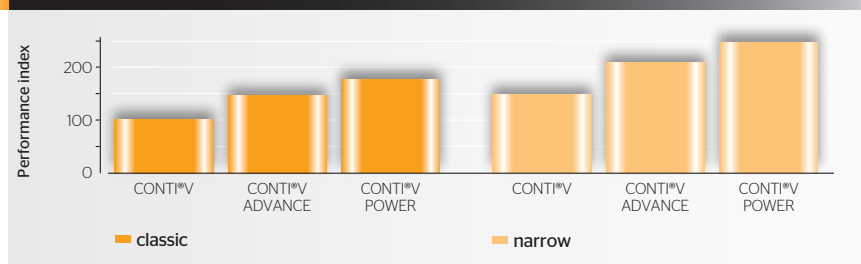

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en