

CONTI[®]V FO


Raw-edge V-belts for demanding drives, according to DIN 2215 and DIN 7753



Properties:

- Temperature range from -30 °C to +70 °C
- Very good flexibility thanks to molded teeth
- Matched set L=L (from 1000 mm)
- Electrically conductive in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof

Belt structure:

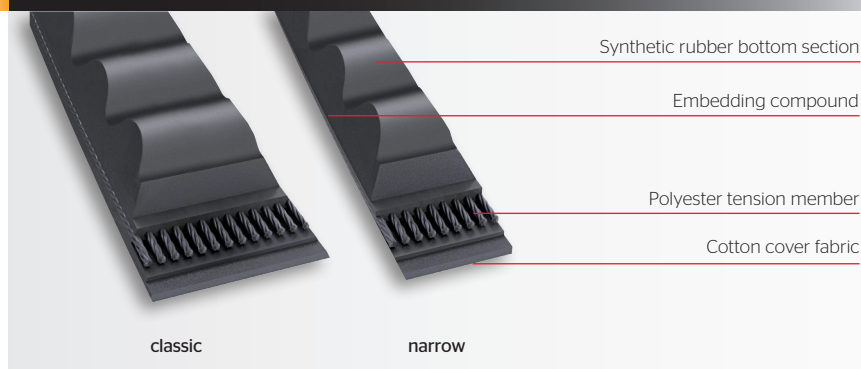


Classic

Profile	Length range L _d (mm)
ZX	505 - 2105
AX	513 - 2697
BX	703 - 3091
CX	1132 - 3062

Narrow

Profile	Length range L _d (mm)
XPZ	512 - 2800
XPA	732 - 2932
XPB	1250 - 2900
XPC	2000 - 2800

Comparison of products:

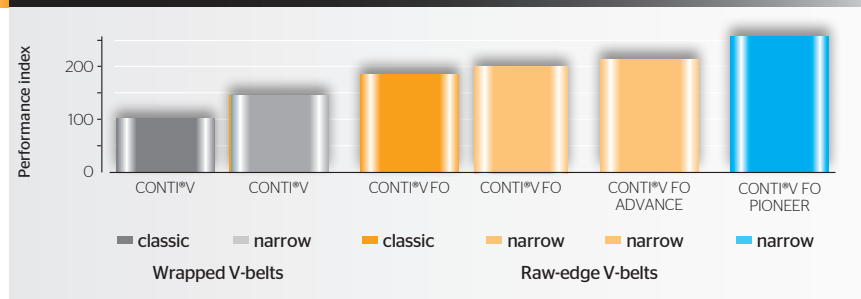

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en