

# CONTI<sup>®</sup>V VARISPEED ADVANCE


Variable speed belts with reinforced PE tensile member for Variomatic and Variator drives



## Properties:

- Temperature range from -30 °C to +90 °C
- Electrically conductive in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof
- Suitable for clutches

## Belt structure:

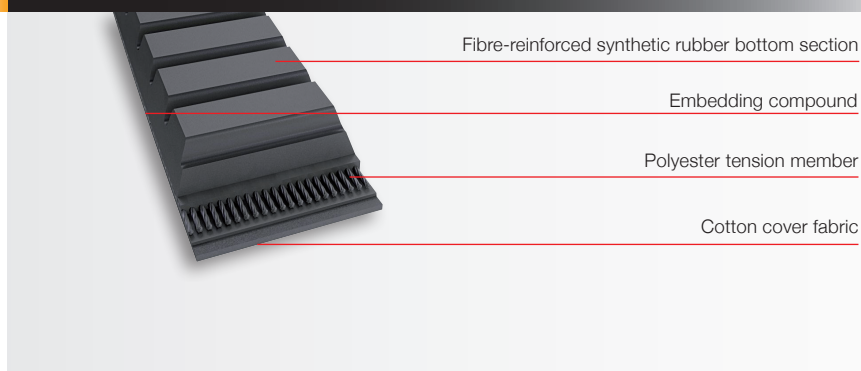

Height/Width	Length range L <sub>i</sub> (mm)
13/6	467 - 1252
17/6 (W 16)	452 - 1202
21/6 (W 20)	532 - 972
22/8	500 - 1800
24/8	600 - 2160
26/8 (W 25)	522 - 1600
28/8	505 - 2005
30/10	617 - 1800
32/10 (W 31,5)	709 - 1652
37/10	647 - 2497
42/12 (W 40)	1000 - 2000
47/12	905 - 2805
52/16 (W 50)	1180 - 3074
55/16	1180 - 2800
65/20 (W 63)	1506 - 3056
70/18	1500 - 3147
83/23 (W 80)	1691 - 3041

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: [www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)